


Quectel EG915N Series

IoT/ M2M-optimized LTE Cat 1 Module

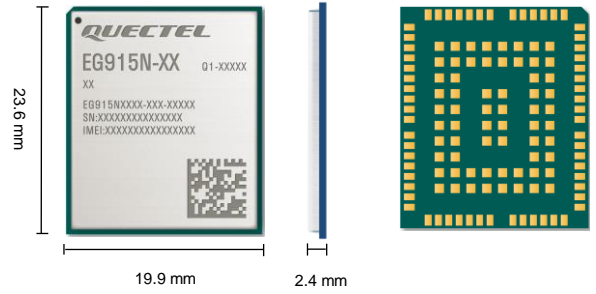

Quectel EG915N is a series of LTE Cat 1 modules optimized specially for M2M and IoT applications. Adopting the 3GPP Rel-9 LTE technology, it delivers maximum data rates up to 10 Mbps downlink and 5 Mbps uplink. Designed in a compact and unified form factor, EG915N series are compatible with Quectel GSM/ GPRS M95 module, LTE Cat M1/ Cat NB2/ EGPRS BG95 series modules, LTE Cat M1/ Cat NB1/ EGPRS BG96 module, LTE Cat 1 EG91 series modules and LTE Cat 4 EG95 series modules, which allows flexible switch among different networks.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows 8/ 8.1/ 10/ 11, Linux, Android) extend the applicability of the module to a wide range of M2M and IoT applications such as industrial router, industrial PDA, tablet PC, video transmission, and digital signage.



Key Features

- ✓ LTE Cat 1 module optimized for M2M and IoT applications
- ✓ Worldwide LTE/ GSM/ GPRS/ EDGE coverage
- ✓ Support DFOTA
- ✓ Super cost-effective
- ✓ LTE multi-mode module in compact size
- ✓ Support Wi-Fi Scan



LTE Cat 1
Max. 10 Mbps (DL)
Max. 5 Mbps (UL)



Compact Size



LGA Package



Embedded Abundant
Protocols



DFOTA



Dual SIM



USB 2.0 High Speed
Interface



VoLTE



Quectel Enhanced
AT Commands



Multi-constellation
GNSS

Version: 1.4 | Status: Released

Quectel EG915N Series

LTE Cat 1	EG915N-EU	EG915N-LA	EG915N-EA
Region/ Operator	Europe	Latin America	Europe/ Asia
Dimensions (mm)	23.6 × 19.9 × 2.4	23.6 × 19.9 × 2.4	23.6 × 19.9 × 2.4
Weight (g)	Approx. 2.46	Approx. 2.46 g	Approx. 2.46
Package	LGA Package	LGA Package	LGA Package
Temperature Range			
Operating Temperature	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C
Extended Temperature	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Frequency Bands			
LTE-FDD	B1/ 3/ 7/ 8/ 20	B2/ 3/ 4/ 5/ 7/ 8/ 28/ 66	B1/ 3/ 7/ 8/ 20/ 28
GSM	B3/ 8	B2/ 3/ 5/ 8	B3/ 8
GNSS (Optional)	GPS/ GLONASS/ Galileo/ BDS/ QZSS	GPS/ GLONASS/ Galileo/ BDS/ QZSS	GPS/ GLONASS/ Galileo/ BDS/ QZSS
Certifications			
Regulatory	Europe: CE The UK: UKCA Australia/ New Zealand: RCM	America: FCC Brazil: Anatel	Europe: CE Australia/ New Zealand: RCM
Others	WHQL	WHQL	WHQL
Data Transmission			
LTE-FDD Data Rate (Mbps)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)
GPRS Data Rate (kbps)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)
EDGE Data Rate (kbps)	236.8 (DL)/ 236.8 (UL)	236.8 (DL)/ 236.8 (UL)	236.8 (DL)/ 236.8 (UL)
Interfaces			
USB 2.0	× 1	× 1	× 1
Digital Audio (PCM)	× 1	× 1	× 1
(U)SIM	× 2 (Dual SIM Single Standby)	× 2 (Dual SIM Single Standby)	× 2 (Dual SIM Single Standby)
NET_STATUS	× 1	× 1	× 1
UART	× 3 (main, debug and auxiliary*)	× 3 (main, debug and auxiliary*)	× 3 (main, debug and auxiliary*)
ADC	× 2	-	-
RESET_N	× 1	× 1	× 1
PWRKEY	× 1	× 1	× 1
I2C	× 1	× 1	× 1
USB_BOOT	× 1	× 1	× 1
Analog Audio Input (× 1) Analog Audio Output (× 1)	× 1 (Microphone and Earpiece)	× 1 (Microphone and Earpiece)	× 1 (Microphone and Earpiece)
Antenna	× 2 (Main and GNSS Antennas (Optional))	× 2 (Main and GNSS Antennas (Optional))	× 2 (Main and GNSS Antennas (Optional))
Voice			
Speech Codec Modes	HR/ FR/ EFR/ AMR/ AMR-WB	HR/ FR/ EFR/ AMR/ AMR-WB	HR/ FR/ EFR/ AMR/ AMR-WB
Echo Arithmetic	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression
Audio	Analog Audio/ Digital Audio	Analog Audio/ Digital Audio	Analog Audio/ Digital Audio
Software Features			
Protocols	TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ CMUX/ HTTPS/ FTPS/ SSL/ FILE/ MQTT/ MMS/ SMTP/ SMTPS	TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ CMUX/ HTTPS/ FTPS/ SSL/ FILE/ MQTT/ MMS/ SMTP/ SMTPS	TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ CMUX/ HTTPS/ FTPS/ SSL/ FILE/ MQTT/ MMS/ SMTP/ SMTPS
USB Serial Driver	Windows 8/ 8.1/ 10/ 11 Linux 2.6–6.5 Android 4.x–13.x	Windows 8/ 8.1/ 10/ 11 Linux 2.6–6.5 Android 4.x–13.x	Windows 8/ 8.1/ 10/ 11 Linux 2.6–6.5 Android 4.x–13.x
RIL Driver	Android 4.x–13.x	Android 4.x–13.x	Android 4.x–13.x
USB RNDIS Driver	Windows 8/ 8.1/ 10/ 11 Linux 2.6–6.5	Windows 8/ 8.1/ 10/ 11 Linux 2.6–6.5	Windows 8/ 8.1/ 10/ 11 Linux 2.6–6.5
USB ECM Driver	Linux 2.6–6.5	Linux 2.6–6.5	Linux 2.6–6.5
GNSS Driver	Android 4.x–13.x	Android 4.x–13.x	Android 4.x–13.x

NOTE:

*: Under development

Quectel EG915N Series

LTE Cat 1	EG915N-EU	EG915N-LA	EG915N-EA
Enhanced Features			
DTMF	●	●	●
DFOTA	●	●	●
Audio Playback/ Audio Recording	●	●	●
QuecLocator®	●	●	●
Wi-Fi Scan	●	●	●
VoLTE	●	●	●
(U)SIM Card Detection	●	●	●
Electrical Features			
Supply Voltage Range	3.4–4.5 V, typ. 3.8 V	3.4–4.5 V, typ. 3.8 V	3.4–4.5 V, typ. 3.8 V
Power Consumption (Typical)	20 µA @ Power off Mode	24 µA @ Power off Mode	24.49 µA @ Power off Mode
	1.16 mA @ LTE Sleep Mode (PF = 128, USB disconnected)	1.35 mA @ LTE Sleep Mode (PF = 128, USB disconnected)	1.22 mA @ LTE Sleep Mode (PF = 128, USB disconnected)
	1.09 mA @ LTE Sleep Mode (PF = 256, USB disconnected)	1.25 mA @ LTE Sleep Mode (PF = 256, USB disconnected)	1.10 mA @ LTE Sleep Mode (PF = 256, USB disconnected)
	19.36 mA @ LTE Idle Mode (PF=64, USB disconnected)	15.81 mA @ LTE Idle Mode (PF=64, USB disconnected)	16.52 mA @ LTE Idle Mode (PF=64, USB disconnected)
	28.49 mA @ LTE Idle Mode (PF=64, USB connected)	28.10 mA @ LTE Idle Mode (PF=64, USB connected)	29.39 mA @ LTE Idle Mode (PF=64, USB connected)

NOTE:

●: Supported